



IRIS IVDX Cloud - 1U Module
A Versatile System



IRIS IVDX Cloud - 1U Module

A Versatile System

IRIS IVDX Cloud - 1U Module is a versatile hardware that can function as a standalone IP-PBX with SIP switching at its core or it can work as a media gateway when registered to a central Soft-switch. Each standalone box supports multiple protocols for ease of operations. It is designed with IMS architecture in mind yet can provide all the enterprise features in a standalone mode. It can further cascade for seamless connectivity with adjacent similar switches in a network thus providing immense amount of resilience.

IRIS IVDX Cloud - 1U Module offers connectivity to all legacy and next generation telecom networks right from POTS, PSTN, ISDN, E1/PRI to GSM to IP, in a single box. It provides easy migration from legacy systems to current and new-age IP based infrastructure. Innovative, reliable and scalable, the IRIS IVDX Cloud - 1U Module integrates voice, video and are loaded with business-enhancing features such as Unified Communications with integrated Voice Mail, Contact Center etc.



Functionality

- ✓ Universal Port Architecture for TDM ports
- ✓ SIP extensions upto 128 / SIP Trunk upto 30 channel
- ✓ Built in Voicemail
- ✓ 16 FXS expandable 96 FXS ports with add on cards
- ✓ Built-in auto attendant with voice guidance for operator less operations.
- ✓ Easy integration with Property Management Solutions and Call Accounting Systems.
- ✓ Large Call Buffer -12,000 Calls
- ✓ AC/ DC power option
- ✓ Support Radio (UHF/VHF) connectivity (RIC)
- ✓ Auto sensing of extension loop length for minimum power consumption
- ✓ Long Loop analog subscribers up to 12 KM
- ✓ Programmable gain setting for all ports
- ✓ QSIG Support
- ✓ Redundancy of Ethernet ports to give Redundant Ethernet Link
- ✓ Redundant optical Fiber link (optional)
- ✓ Video Calling using Video IP phone
- ✓ Guard against Toll Fraud / DOS attack
- ✓ Provides standard set of subscriber features with Caller ID display (with name)
- ✓ 4 X 16 Party Meet me Conferencing.
- ✓ Use of industrial grade components for very high MTBF.
- ✓ Low power consumption by use of high efficiency power circuit and control circuits.
- ✓ Protection against transients on each line.
- ✓ Compact, light weight and standard 19 inch rack mountable cabinet.
- ✓ User friendly GUI for system management
- ✓ Feature rich Automatic Call Distribution (ACD)
- ✓ Message waiting Lamp support on analog subscribers (MWL)
- ✓ Smart Mobility using Mobile phones
- ✓ CLI Based routing
- ✓ Flexible Numbering plan up to 8 digit
- ✓ PMS/HMS Integration

Specifications

- | | |
|-------------------|--|
| Technology | - IP at Core |
| Architecture | - Universal Slot |
| Interface Support | - IP & TDM |
| Ethernet port | - 02 Redundant Gigabit Ethernet Ports (Optional Optical ports) |
| IP interface | - SIP User / SIP trunks |
| Cabinet | - 1U, 19" Rack Mount |

Subscriber options

- Analog Extension
- Digital Key Phone
- IP Phone
- Video IP Phone
- Soft Phone client
- PC based Operator Console

Interface Supported

- | | |
|------------------------------------|------------|
| Analog Trunk | - 04 to 12 |
| Digital Subscribers | - 04 to 12 |
| Analog Subscriber | - 16 to 96 |
| ISDN PRI | - 01 to 02 |
| GSM (2G,3G,4G) | - 04 to 08 |
| RIC | - 02 |
| External Paging & Alarm/Siren Port | - 08 |

SIP License

- | | |
|-----------|--------------|
| SIP Users | - 30 to 128* |
| SIP Trunk | - 12 to 64* |

Protocols & Standard supported

IPv4/IPv6, DTMF, Loop Dial, E1 CAS, ISDN/ QSIG, SIP, TCP/IP, UDP, RTP, SSH, SSL, NTP, DHCP, NAT, IEEE 802.1X

Voip Properties


Open Standard SIP Support

Codec Supported

G.711a, G.711u, G.722, G723, G726, G729, iLBC, GSM

System and Maintenance

Field upgradable by use of add on board
Internal and external memory backup of call details and programming built-in protection on all ports. User friendly Web based User Interface for system programming.

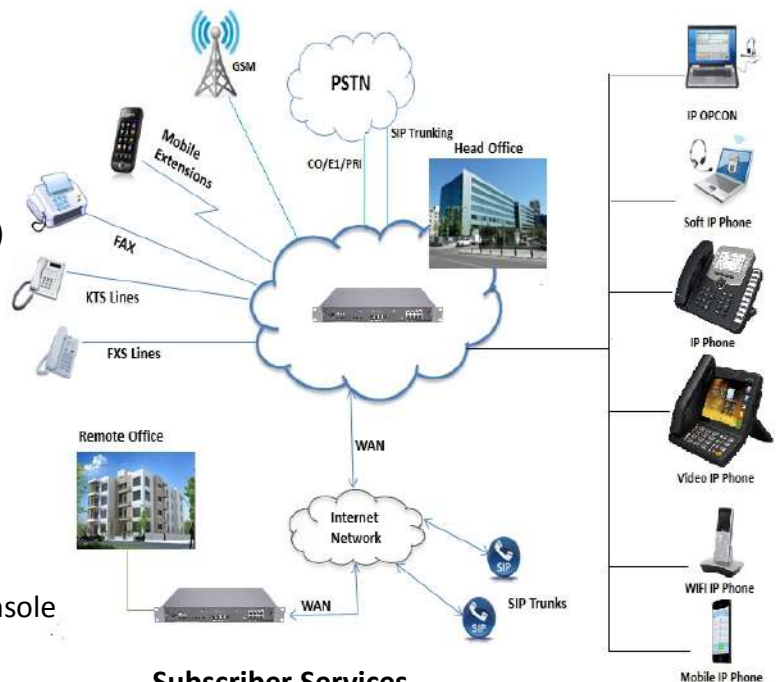

Subscriber Services

- | | |
|----------------|-----------------------------|
| CLI with Name | Call Forward (Int/External) |
| Call Hold | Call Transfer |
| Call Pick-up | Multi Party Conferencing |
| Meet Me Conf | Dial In Conf |
| Call barring | Parallel Ringing |
| ACD | Call Listening |
| Auto Redial | CUG |
| Boss Sectary | CLI Based routing |
| CDR | Do-Not-Disturb |
| Memory Dialing | DID/DOD |
| Hotline | RCOC |
| Voicemail | Video Call |



Digital Key Phone

- 2X16 Character LCD Display
- 12/24 No's DSS keys with Status LED
- 10 No's Features Keys

Power Supply

- AC Operation – 90-265V AC
- DC Operation – 36-60V DC
- Power Consumptions – 0.7W/Line



Inspiring convergence through technological innovations and turning the broadband dream to reality.
Experience the “Coral phenomena”!!!

Coral Telecom Limited.

E-2, Sector 63
Noida - 201301, INDIA
T: +91-120-2595815
F: +91-120-2595888
E: corporate@coraltele.com
W: www.coraltele.com